
Stainless Steel Saddles & Repair Clamps

Price List: PLF-SC Vol.3 Effective Date: June 1, 2019







Western Canada

12487-82nd Avenue, Surrey B.C. V3W 3E8 T: 604-531-8408 / 1- 877-531-8478 F: 604-531-8468 / 1- 877-531-8468 info@pro-linefittings.com

Eastern Canada

740 Huronia Road, Unit #17 Barrie, Ontario L4N 6C6 T: 705-733-7720 / 1-855-733-7720 F: 705-733-7710 / 1-855-733-7710 sales@pro-linefittings.com


Contents:

♦ CR1 SS Single Section Repair Clamp	1-2
♦ CR2 SS Double Section Repair Clamp	3-4
♦ CR2 SS Double Section Tapped Repair Cl	<i>famp</i> 5-6
♦ CR3 SS Triple Section Repair Clamp	7-8
♦ SC2 Single Band SS Saddle	9-10
♦ SC4 Double Band SS Saddle	11-12

At Pro-Line we're committed to **CUSTOMER SERVICE EXCELLENCE**. This means quick quotes, the highest quality fittings, delivered as promised each and every time.

CANPAC SINGLE SECTION REPAIR CLAMPS (CR1 STYLE)

Submittal Information

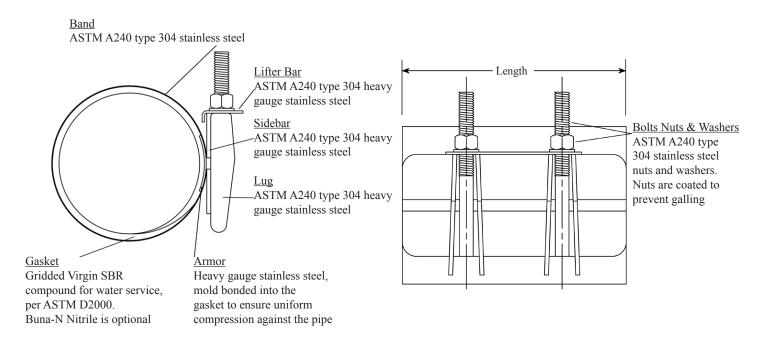

Pipe		0.0.0	Length a	ind approx.	shipping w	eight lbs.
Diameter	Catalogue Number	O.D. Range	08" Long	12" Long	16" Long	24" Long
2	CR1LENGTH0238	2.35-2.63	4	5	N/A	N/A
21/2	CR1LENGTH0288	2.70-3.00	5	6	N/A	N/A
3	CR1LENGTH0350	3.46-3.70	5	6	9	N/A
4	CR1LENGTH0450	4.50-4.80	6	8	10	16
4	CR1LENGTH0480	4.74-5.14	6	8	10	16
6	CR1LENGTH0663	6.56-6.96	7	10	14	21
6	CR1LENGTH0690	6.84-7.24	7	10	14	21
6	CR1LENGTH0745	7.05-7.45	7	10	14	21
8	CR1LENGTH0863	8.54-8.94	8	11	15	24
8	CR1LENGTH0905	8.99-9.39	8	11	15	24
8	CR1LENGTH0940	9.27-9.67	8	11	15	24
10	CR1LENGTH1000	9.70-10.10	11	16	24	32
10	CR1LENGTH1075	10.60-11.04	11	16	24	32
10	CR1LENGTH1110	11.04-11.44	11	16	24	32
10	CR1LENGTH1140	11.34-11.74	11	16	24	32
12	CR1LENGTH1275	12.60-13.02	13	18	27	36
12	CR1LENGTH1320	13.10-13.50	13	18	27	36

PRO-LINE FITTINGS

CANPAC SINGLE SECTION REPAIR CLAMPS (CR1 STYLE)



Nominal Pipe Size	Catalogue Number	O.D. Range	08" Long	12" Long	16" Long	24" Long
2	CR1LENGTH0238	2.35-2.63	102.03	159.87	N/A	N/A
21/2	CR1LENGTH0288	2.70-3.00	102.03	161.78	N/A	N/A
3	CR1LENGTH0350	3.46-3.70	102.03	162.82	217.86	N/A
4	CR1LENGTH0450	4.50-4.80	108.38	164.93	220.93	P.O.R
4	CR1LENGTH0480	4.74-5.14	108.38	164.93	220.93	P.O.R
6	CR1LENGTH0663	6.56-6.96	120.43	206.57	248.77	P.O.R
6	CR1LENGTH0690	6.84-7.24	120.43	206.57	248.77	P.O.R
6	CR1LENGTH0745	7.05-7.45	120.43	206.57	248.77	P.O.R
8	CR1LENGTH0863	8.54-8.94	136.24	242.90	277.65	P.O.R
8	CR1LENGTH0905	8.99-9.39	136.24	242.90	277.65	P.O.R
8	CR1LENGTH0940	9.27-9.67	P.O.R	P.O.R	P.O.R	P.O.R
10	CR1LENGTH1000	9.70-10.10	P.O.R	P.O.R	P.O.R	P.O.R
10	CR1LENGTH1075	10.60-11.04	P.O.R	P.O.R	P.O.R	P.O.R
10	CR1LENGTH1110	11.04-11.44	P.O.R	P.O.R	P.O.R	P.O.R
10	CR1LENGTH1140	11.34-11.74	P.O.R	P.O.R	P.O.R	P.O.R
12	CR1LENGTH1275	12.60-13.02	P.O.R	P.O.R	P.O.R	P.O.R
12	CR1LENGTH1320	13.10-13.50	P.O.R	P.O.R	P.O.R	P.O.R


^{*} Gasket is SBR per ASTM D2000

^{*} Optional outlet taps are available for repair of service line pull-outs


* All welds are fully passivated to restore corrosion resistant characteristics of stainless steel

CANPAC DOUBLE SECTION REPAIR CLAMPS (CR2 STYLE)

Submittal Information

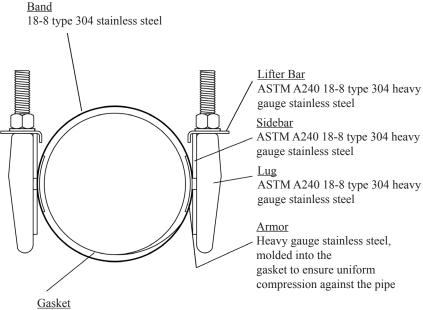

Bolts Nuts & Washers
ASTM A240 18-8 type 304 stainless steel
nuts and washers. Nuts are coated to prevent galling



Gridded Virgin SBR compound for water service, per ASTM D2000.

Pipe		0.0.0	Length a	ınd approx.	shipping w	eight lbs.
Diameter	Catalogue Number	O.D. Range	08" Long	12" Long	16" Long	24" Long
4	CR2LENGTH0450	4.44-5.24	11	18	26	38
4	CR2LENGTH0480	4.74-5.57	11	18	26	38
6	CR2LENGTH0663	6.62-7.42	12	19	28	42
6	CR2LENGTH0690	6.84-7.64	12	19	28	42
8	CR2LENGTH0863	8.62-9.42	13	21	30	46
8	CR2LENGTH0905	8.99-9.79	13	21	30	46
10	CR2LENGTH1075	10.70-11.50	N/A	23	32	50
10	CR2LENGTH1110	11.04-11.84	N/A	23	32	50
10	CR2LENGTH1140	11.60-12.40	N/A	23	32	50
12	CR2LENGTH1275	12.70-13.50	N/A	25	34	54
12	CR2LENGTH1320	13.14-13.94	N/A	25	34	54
12	CR2LENGTH1365	13.65-14.45	N/A	25	34	54
14	CR2LENGTH1507	15.07-15.82	N/A	27	36	58
16	CR2LENGTH1715	17.15-17.90	N/A	29	38	62

PRO-LINE FITTINGS

CANPAC DOUBLE SECTION REPAIR CLAMPS (CR2 STYLE)



Nominal Pipe Size	Catalogue Number	O.D. Range	08" Long	12" Long	16" Long	24" Long
4	CR2LENGTH0450	4.44-5.24	166.28	258.88	349.03	523.07
4	CR2LENGTH0480	4.74-5.57	166.28	258.88	349.03	523.07
6	CR2LENGTH0663	6.62-7.42	188.99	283.15	369.17	651.70
6	CR2LENGTH0690	6.84-7.64	188.99	283.75	369.17	651.70
8	CR2LENGTH0863	8.62-9.42	194.94	301.94	399.12	744.35
8	CR2LENGTH0905	8.99-9.79	194.94	301.94	399.12	744.35
10	CR2LENGTH1075	10.70-11.50	N/A	493.40	509.01	P.O.R.
10	CR2LENGTH1110	11.04-11.84	N/A	493.40	509.01	P.O.R.
10	CR2LENGTH1140	11.60-12.40	N/A	493.40	509.01	P.O.R.
12	CR2LENGTH1275	12.70-13.50	N/A	560.21	575.41	P.O.R.
12	CR2LENGTH1320	13.14-13.94	N/A	560.21	575.41	P.O.R.
12	CR2LENGTH1365	13.65-14.45	N/A	560.21	575.41	P.O.R.
14	CR2LENGTH1507	15.07-15.82	N/A	P.O.R.	P.O.R.	P.O.R.
16	CR2LENGTH1715	17.15-17.90	N/A	P.O.R.	P.O.R.	P.O.R.


^{*} Gasket is SBR per ASTM D2000

^{*} Optional outlet taps are available for repair of service line pull-outs


^{*} All welds are fully passivated to restore corrosion resistant characteristics of stainless steel

CANPAC DOUBLE SECTION TAPPED REPAIR CLAMPS (CR2 STYLE)

Submittal Information

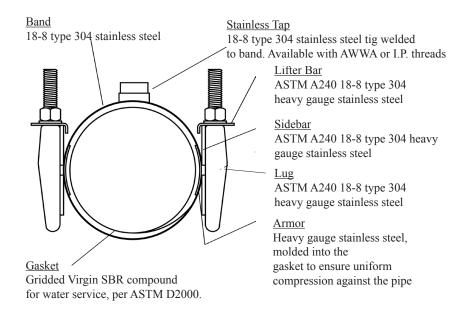

Bolts Nuts & Washers
ASTM A240 18-8 type 304 stainless steel
nuts and washers. Nuts are coated to prevent galling



Pipe		0 D D	Length a	and approx.	shipping w	eight lbs.
Diameter	Catalogue Number	O.D. Range	08" Long	12" Long	16" Long	24" Long
4	CR2LENGTH0480075CC	4.74-5.57	11	18	26	38
4	CR2LENGTH0480100CC	4.74-5.57	11	18	26	38
4	CR2LENGTH0480100IP	4.74-5.57	11	18	26	38
6	CR2LENGTH0690075CC	6.84-7.64	12	19	28	42
6	CR2LENGTH0690100CC	6.84-7.64	12	19	28	42
6	CR2LENGTH0690100IP	6.84-7.64	12	19	28	42
8	CR2LENGTH0905075CC	8.99-9.79	13	21	30	46
8	CR2LENGTH0905100CC	8.99-9.79	13	21	30	46
8	CR2LENGTH0905100IP	8.99-9.79	13	21	30	46

CANPAC DOUBLE SECTION TAPPED REPAIR CLAMPS (CR2 STYLE)



}	Nominal Pipe Size	Catalogue Number	O.D. Range	8"	12"	16"	24"
	4	CR2LENGTH- 0480075CC	4.74-5.57	222.87	311.55	389.73	P.O.R.
	4	CR2LENGTH- 0480100CC	4.74-5.57	222.87	311.55	389.73	P.O.R.
	4	CR2LENGTH- 0480100IP	4.74-5.57	222.87	311.55	389.73	P.O.R.
	6	CR2LENGTH- 0690075CC	6.84-7.64	248.75	329.99	414.20	P.O.R.
	6	CR2LENGTH- 0690100CC	6.84-7.64	248.75	329.99	414.20	P.O.R.
	6	CR2LENGTH- 0690100IP	6.84-7.64	248.75	329.99	414.20	P.O.R.
	8	CR2LENGTH- 0905075CC	8.99-9.79	275.51	342.62	463.51	P.O.R.
	8	CR2LENGTH- 0905100CC	8.99-9.79	275.51	342.62	463.51	P.O.R.
	8	CR2LENGTH- 0905100IP	8.99-9.79	275.51	342.62	463.51	P.O.R.


^{*}All repair clamps are available with outlets in 3/4" CC/IP, 1" CC/IP, 1-1/2" CC/IP, or 2" CC/IP. Please contact Pro-Line for quotations.


^{*} Gasket is SBR per ASTM D2000

^{*} All welds are fully passivated to restore corrosion resistant characteristics of stainless steel

CANPAC TRIPLE SECTION REPAIR CLAMPS (CR3 STYLE)

Submittal Information

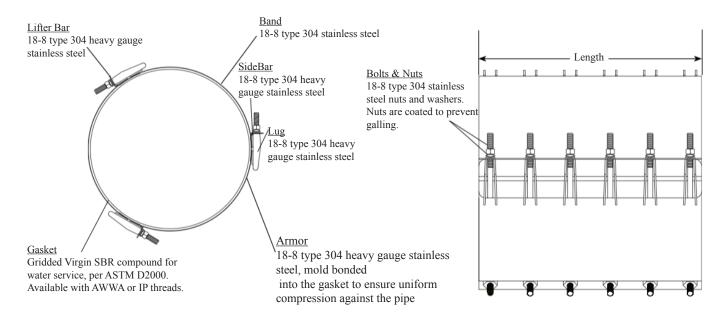



Pipe	C 4 1 N 1	0 D D	Length and approx. shipping weight lbs.			
Diameter	Catalogue Number	er O.D. Range		16" Long	24" Long	
16	CR3LENGTH1830	17.10-18.30	31	40	64	
18	CR3LENGTH1920	18.00-19.20	35	44	68	
18	CR3LENGTH2070	19.50-20.70	35	44	68	
20	CR3LENGTH2280	21.60-22.80	41	48	73	
24	CR3LENGTH2700	25.80-27.00	46	53	79	


CANPAC TRIPLE SECTION REPAIR CLAMPS (CR3 STYLE)



Nominal Pipe Size	Catalogue Number	O.D. Range	12" Long	16" Long	24" Long
16	CR3LENGTH1830	17.10-18.30	P.O.R	P.O.R	P.O.R
18	CR3LENGTH1920	18.00-19.20	P.O.R	P.O.R	P.O.R
18	CR3LENGTH2070	19.50-20.70	P.O.R	P.O.R	P.O.R
20	CR3LENGTH2280	21.60-22.80	P.O.R	P.O.R	P.O.R
24	CR3LENGTH2700	25.80-27.00	P.O.R	P.O.R	P.O.R

CANPAC SINGLE BAND STAINLESS STEEL SADDLE (SC2 STYLE)

Submittal Information

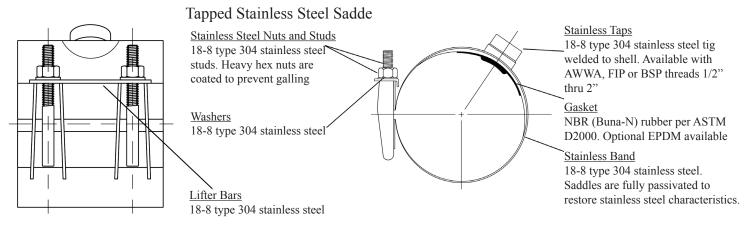

Nominal Pipe Size	Catalogue Number	O.D. Range	3/4" & 1" Tap Weight	1-1/2" & 2" Tap Weight
3	SC20350TAP	3.50	2	4
4	SC20485TAP	4.50-4.80	3	4
6	SC20700TAP	6.63-6.90	5	5
6	SC20745TAP	7.05-7.45	5	5
8	SC20908TAP	8.63-9.05	5.5	6
10	SC21116TAP	10.75-11.10	6	9
12	SC21321TAP	12.75-13.20	7	10

^{*} To Order: Select the catalogue number for the desired pipe range and complete the catalogue number by adding the outlet thread tap code. Example, a single band saddle for 13.20.O.D. pipe with a 3/4 " IP thread would be <u>SC21321075IP</u>

Outlet Tap Code

CC (AWWA) Thread				
Thread	Code No.	Submitted Item(s)		
3/4" CC	075CC			
1" CC	100CC			
1-1/2" CC	150CC			
2" CC	200CC			

IP Thread					
Thread	Code No.	Submitted Item(s)			
3/4" CC	075IP				
1" CC	100IP				
1-1/2" CC	150IP				
2" CC	200IP				

Features

- * All components are made of 18-8 Type 304 Stainless Steel
- * Approved for use on HDPE
- * Fully passivated for corrosion resistance
- * Saddles 6"and larger have coined body for gasket retention. 4" saddles with 1" or larger tap are coined
- *NBR (Buna-N) rubber pad gasket per ASTM D2000 with rised compression seal
- * Rated for 250 PSI working presure

CANPAC SINGLE BAND STAINLESS STEEL SADDLE (SC2 STYLE)

Tapped Stainless Saddle




Nominal Pipe Size	Catalogue Number	O.D. Range	List Price 3/4" & 1" Tap
3	SC20350TAP	3.50	86.11
4	SC20485TAP	4.50-4.80	87.79
6	SC20700TAP	6.63-6.90	96.63
6	SC20745TAP	7.05-7.45	106.29
8	SC20908TAP	8.63-9.05	99.66
10	SC21116TAP	10.75-11.10	119.46
12	SC21321TAP	12.75-13.20	122.18


Nominal Pipe Size	Catalogue Number	O.D. Range	List Price 1-1/2" & 2" Tap
3	SC20350TAP	3.50	103.17
4	SC20485TAP	4.50-4.80	134.07
6	SC20700TAP	6.63-6.90	137.98
6	SC20745TAP	7.05-7.45	151.78
8	SC20908TAP	8.63-9.05	142.75
10	SC21116TAP	10.75-11.10	151.57
12	SC21321TAP	12.75-13.20	159.53

CANPAC DOUBLE BAND STAINLESS STEEL SADDLE (SC4 STYLE)

Submittal Information

Tapped Stainless Steel Saddle



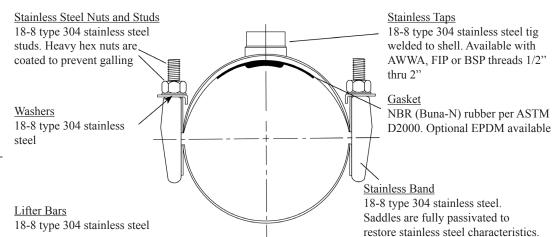

Nominal Pipe Size	Catalogue Number	O.D. Range	3/4" & 1" Tap Weight	1-1/2" & 2" Tap Weight
4	SC40535TAP	4.50-5.30	5	6
6	SC40745TAP	6.60-7.40	5	6
8	SC40967TAP	8.40-9.20	6	8
10	SC41116TAP	10.70-11.50	7	9
12	SC41320TAP	12.70-13.50	9	11
14	SC41530TAP	14.95-15.75	10	12
16	SC41740TAP	17.20-18.00	11	13
18	SC41950TAP	18.80-19.60	11	13

Outlet Tap Code

CC (AWWA) Thread		
Thread	Code No.	Submitted Item(s)
3/4" CC	075CC	
1" CC	100CC	
1-1/2" CC	150CC	
2" CC	200CC	

IP Thread		
Thread	Code No.	Submitted Item(s)
3/4" CC	075IP	
1" CC	100IP	
1-1/2" CC	150IP	
2" CC	200IP	

Features

- * All components are made of 18-8 Type 304 Stainless Steel
- * Approved for use on HDPE
- * Fully passivated for corrosion resistance

^{*} Saddles 6"and larger have coined body for gasket retention. 4" saddles with 1" or larger tap are coined

^{*}NBR (Buna-N) rubber pad gasket per ASTM D2000 with rised compression seal

^{*} Rated for 250 PSI working presure

CANPAC DOUBLE BAND STAINLESS STEEL SADDLE (SC4 STYLE)

Tapped Stainless Saddle



Nominal Pipe Size	Catalogue Number	O.D. Range	List Price 3/4" & 1" Tap
4	SC40535TAP	4.50-5.30	160.62
6	SC40745TAP	6.60-7.40	167.38
8	SC40967TAP	8.40-9.20	168.73
10	SC41116TAP	10.70-11.50	170.05
12	SC41320TAP	12.70-13.50	171.37
14	SC41530TAP	14.95-15.75	P.O.R.
16	SC41740TAP	17.20-18.00	P.O.R.
18	SC41950TAP	18.80-19.60	P.O.R.

Nominal Pipe Size	Catalogue Number	O.D. Range	List Price 1-1/2" & 2" Tap
4	SC40535TAP	4.50-5.30	191.09
6	SC40745TAP	6.60-7.40	194.62
8	SC40967TAP	8.40-9.20	201.47
10	SC41116TAP	10.70-11.50	205.99
12	SC41320TAP	12.70-13.50	207.84
14	SC41530TAP	14.95-15.75	P.O.R.
16	SC41740TAP	17.20-18.00	P.O.R.
18	SC41950TAP	18.80-19.60	P.O.R.

Terms and Conditions of Sale

1. General

All sales are subject to Pro-Line's Fittings Inc. ("Vendor") general terms and conditions as posted on the Vendor's website at the time of sale. The Purchaser's order is accepted subject to the Vendor's terms and condition and any other terms and conditions agreed to in writing by the Vendor and Purchaser. It is agreed that any terms and conditions contained in the Purchaser's order or otherwise stipulated will be deemed for the Purchaser's internal use only and will not be binding on the Vendor.

2. Orders:

Purchase orders received are conditional upon satisfactory credit approval by the Vendor. Once confirmed by the Vendor orders for custom-made products manufactured by the Purchaser's specifications and orders of large quantities for non-inventoried products cannot be cancelled, modified or returned without the Vendor's written consent and upon terms which provide for indemnification of the Vendor for costs and expenses incurred.

Shipments

Delivery schedules stipulated in either the Vendor's "Sales Quote" or the "Sales Order Confirmation" are approximate only and shipments will be made within reasonable proximity thereto. All shipments are F.O.B Vendor's location unless otherwise agreed to in writing between the Vendor and Purchaser. The Vendor may agree to different shipping terms as specified in the Sales Quote or in the Sales Order Confirmation. Freight prepaid orders, when applicable will be delivered by the carrier of the Vendor's selection, unless the use of another carrier is agreed to in writing with the Purchaser. Prepaid orders

will be delivered based on the most economical route as determined by the Vendor. If the Purchaser requires another means of delivery that offered by the Vendor, the Purchaser agrees to incur the additional cost. Each Sales Order Confirmation maybe shipped in whole or in part at the Vendor's discretion. The Vendor shall bear no liability for Products lost or damaged during transit. Under no circumstances will the Vendor be responsible for any damage whatsoever caused by delays in shipment. The Purchaser must verify quantities and report discrepancies within 3 business days of receipt. The Vendor reserves the right to optimize packaging at its discretion. Some products may only be available in bulk package multiples or case quantities.

4. Prices

All prices published or quoted are subject to change without notice until orders are accepted by the Vendor and issuance of a Sales Confirmation, whereupon prices will remain firm for those shipments within thirty (30) days following the day of the Vendor's Sales Order Confirmation. For specific contracts or projects, the Vendor may agree to in writing to protect the prices for an extended period of time. To remove a charge for applicable taxes, the Purchaser must provide the Vendor with tax exemption certificates or any documents as required by a specific tax jurisdiction.

5. Payment Terms

Payment is based on the delivery date of the products and is due by the fifteenth (15th) of the following month. If applicable, cash discounts, expressed and a percentage, are calculated on the net invoiced price, before taxes, freight, or other charges and can only be deducted from the payment if the Vendor received payment from the Purchaser on or prior to the due date, otherwise no cash discount is applicable. Overdue accounts shall bear interest at rate of 18% per annum. The granting of credit by the Vendor is based on an evaluation of the Purchaser's financial condition. If the financial condition does not justify

continuance on credit, the Vendor may require full or partial advance payment.

6. Return of Products:

The Vendor may accept the return of Products, subject to the following terms and conditions: 1) Prior to the return of any Products.

the Purchaser must obtain a Return Goods Authorization (RGA) number from the Vendor, 2) All Products must be returned freight prepaid, unless otherwise authorized by the Vendor,

3) Products must be received in good saleable condition. A minimum return or re-stocking charge of 25% of the purchase price will

be applied against the credit issued pursuant to the returned Products, except in the case of the Vendor's shipping error.

7. Warranty and Limitations of Liability

All the Vendor's Products are guaranteed against defects resulting from faulty workmanship or materials, subject to limitations, exceptions, disclaimers and conditions stipulated hereunder or specified with respect to particular Products and posted or amended on the Vendor's website of literature. The Vendor will replace free of charge, including shipping charges for the replacement of any Products which are found to be defective in workmanship or material provided that the following conditions are met.

- a. The Vendor is promptly notified in writing of such a defect immediately upon discovery and the defective Products is promptly returned to the Vendor. The Claimant must provide documentation of evidence of failure, as well as the failed product that has alleged to have failed and agree to in section of the defective Product by the Vendor.
- b. The Product has not been altered or modified after leaving the Vendor's premises, has not been used in more than one installation, show no evidence of tampering or disassembly, not subject to abnormal operating conditions, abuse or misuse.
- c. The Products have been used in applications or under conditions that are in not accordance with the technical information available from the Vendor.
- d. The Vendor disclaims any liability or responsibility for labour, materials and or other expenses to replace the defective Product or to repair and damage resulting from the use there of; for Purchaser's calculations, product design or engineering specifications; for the accuracy of any plans, drawing or specifications furnished to the purchaser as part of the sale of any of its products.

Pro-Line Fittings Inc. Terms and Conditions, April 2014

J	



Contacts:

Western Canada

12487-82nd Avenue, Surrey B.C. V3W 3E8

T: 604-531-8408 / 1- 877-531-8478 F: 604-531-8468 / 1- 877-531-8468

info@pro-linefittings.com

Eastern Canada

740 Huronia Road, Unit #17 Barrie, Ontario L4N 6C6

T: 705-733-7720 / 1-855-733-7720 F: 705-733-7710 / 1-855-733-7710

sales@pro-linefittings.com