


# **TRUMBULL**

## **CHAINWHEELS** & ACCESSORIES

TO OPERATE OVERHEAD VALVES

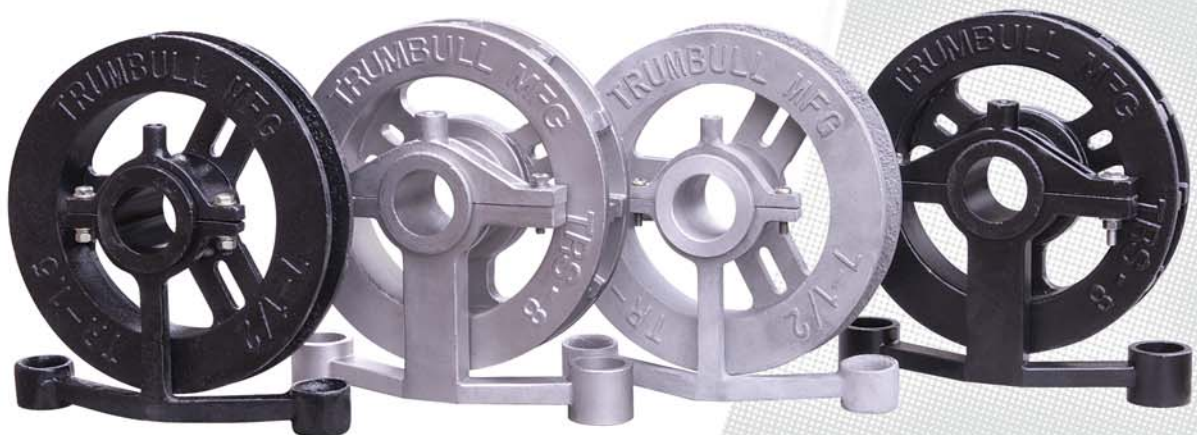

DUCTILE IRON

STAINLESS STEEL

ALUMINUM

CARBON STEEL

## Ductile Iron Chainwheels

*Sprocket-Type, for use with Single Loop Cut Chain*

*Used to operate overhead valves from the floor.*

**DUCTILE IRON CHAINWHEELS** allow operation of valves, actuators, or gear boxes in high, hard-to reach locations by means of a slight pull on the chain. Universal design allows Chainwheel to be clamped to handwheel, or pinned directly to the stem.

Ductile Iron Chainwheels are furnished with plated steel attachment hardware for clamping to a handwheel. When Chainwheel is to be pinned to the stem, direct mount adapters are available. The adapters require pinning to the stem as illustrated on page 10. Adapter is pre-drilled with pin hole, and supplied with a stainless steel pin for customer mounting to the stem. Drilling of the stem by customer. To prevent serious injury, we recommend the use of our Secondary Safety Restraint System (see pages 13 and 14). All Trumbull Chainwheels are furnished with a threaded boss for the addition of our Safety Restraint System.

Trumbull Item No.	Size No.	Diameter	Boxed Weight	Handwheel OD Range Chainwheel will Fit	Chain Size	Galvanized Chain	Stainless Chain	Chain Length (2X drop) plus...
						Trumbull Item No.	Trumbull Item No.	
<b>367-1873</b>	TR-0.0	4"	2.25 lbs.	2" to 4"	#2	<b>172-1650</b>	----	1 ft.
<b>367-1874</b>	TR-1.0	6"	5.40 lbs.	4-1/4" to 5-3/4"	1/0	<b>367-1894</b>	<b>367-1897</b>	1 ft.
<b>367-1875</b>	TR-1.5	7-1/2"	8.75 lbs.	6" to 7-1/2"	1/0	<b>367-1894</b>	<b>367-1897</b>	1 ft.
<b>367-1876</b>	TR-2.0	9"	13.40 lbs.	7-3/4" to 9"	1/0	<b>367-1894</b>	<b>367-1897</b>	1-1/2 ft.
<b>367-1877</b>	TR-2.5	12-1/2"	17.00 lbs.	9-1/4" to 12-1/2"	4/0	<b>367-1895</b>	<b>367-1898</b>	1-1/2 ft.
<b>367-1878</b>	TR-3.0	15-1/2"	21.60 lbs.	12-3/4" to 15-1/2"	4/0	<b>367-1895</b>	<b>367-1898</b>	2 ft.
<b>367-1879</b>	TR-3.5	19"	30.85 lbs.	15-3/4" to 19"	4/0	<b>367-1895</b>	<b>367-1898</b>	2-1/2 ft.
<b>367-1880</b>	TR-4.0	22"	42.75 lbs.	19-1/4" to 22"	5/0	<b>367-1896</b>	<b>367-1901</b>	3 ft.
<b>367-1881</b>	TR-4.5	26"	49.00 lbs.	22-1/2" to 26"	5/0	<b>367-1896</b>	<b>367-1901</b>	3-1/2 ft.
<b>367-1882</b>	TR-5.0	30"	63.40 lbs.	22-1/2" to 36"	5/0	<b>367-1896</b>	<b>367-1901</b>	4 ft.


When ordering, indicate the Chainwheel and chain size numbers and the number of feet of chain required. Chain is provided in continuous lengths and easily cut in the field to exact length needed.

Closing the loop is simple with Connecting Links . . .

### — TR Series Connecting Links —

Chain Size	Galv.	Stainless
	Trumbull Item No.	Trumbull Item No.
1/0	<b>367-1994</b>	<b>367-1997</b>
4/0	<b>367-1995</b>	<b>367-1998</b>
5/0	<b>367-1996</b>	----

See page 11 for more information about our Connecting Links.

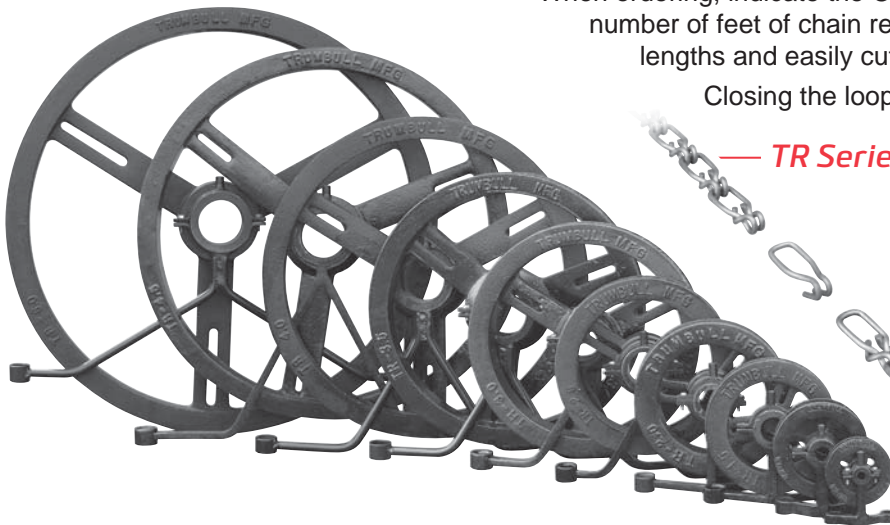

**DUCTILE IRON** and Aluminum Chainwheels are sprocket-type, using single loop cut chain. Carbon Steel and Stainless Steel Chainwheels are pocket-type, using smooth welded link machine chain. See page 7 for Chainwheel dimensions.

## Aluminum Chainwheels


*Sprocket-Type, for use with Single Loop Cut Chain*  
*Used to operate overhead valves from the floor.*

**ALUMINUM CHAINWHEELS** allow operation of valves, actuators, or gear boxes in high, hard-to reach locations by means of a slight pull on the chain. The light weight of aluminum Chainwheels is desirable to minimize the weight on the stems. Universal design allows Chainwheel to be clamped to a handwheel, or pinned directly to the stem.

Provided with a protective coating.

Aluminum Chainwheels are furnished with stainless steel attachment hardware for clamping to a handwheel. When Chainwheel is to be pinned to the stem, direct mount adapters are available. The adapters require pinning to the stem as illustrated on page 10. Adapter is pre-drilled with pin hole, and supplied with a stainless steel pin for customer mounting to the stem. Drilling of the stem by customer.

To prevent serious injury, we recommend the use of our Secondary Safety Restraint System (see pages 13 and 14 for more information). All Trumbull Chainwheels are furnished with a threaded boss for the addition of our Safety Restraint System.

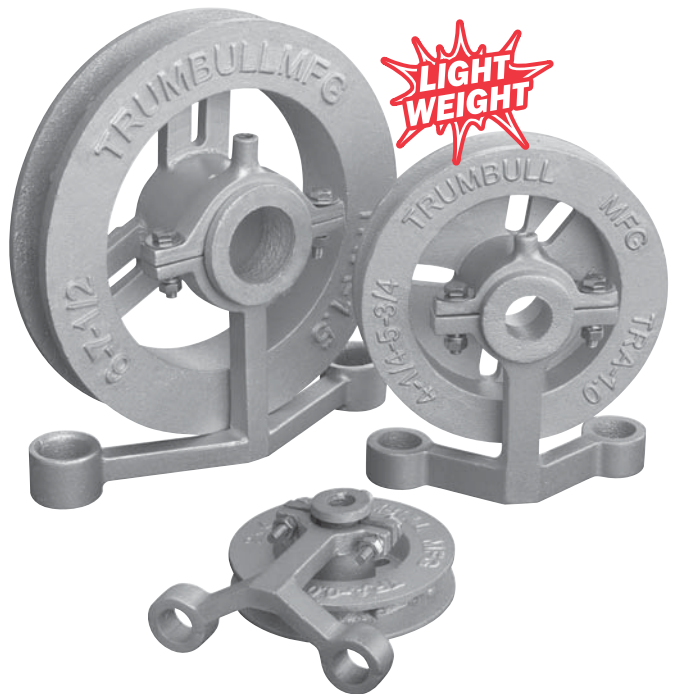

Trumbull Item No.	Size No.	Diameter	Boxed Weight	Handwheel OD Range Chainwheel will Fit	Chain Size	Galvanized Chain	Stainless Chain	Chain Length (2X drop) plus...
						Trumbull Item No.	Trumbull Item No.	
<b>367-2020</b>	TRA-0.0	4"	1.05 lbs.	2" to 4"	#2	<b>172-1650</b>	----	1 ft.
<b>367-2021</b>	TRA-1.0	6"	2.65 lbs.	4-1/4" to 5-3/4"	1/0	<b>367-1894</b>	<b>367-1897</b>	1 ft.
<b>367-2022</b>	TRA-1.5	7-1/2"	4.15 lbs.	6" to 7-1/2"	1/0	<b>367-1894</b>	<b>367-1897</b>	1 ft.
<b>367-2023</b>	TRA-2.0	9"	5.30 lbs.	7-3/4" to 9"	1/0	<b>367-1894</b>	<b>367-1897</b>	1-1/2 ft.
<b>367-2024</b>	TRA-2.5	12-1/2"	7.90 lbs.	9-1/4" to 12-1/2"	4/0	<b>367-1895</b>	<b>367-1898</b>	1-1/2 ft.

### Ordering Info

When ordering, indicate the Chainwheel and chain size numbers and the number of feet of chain required. Chain is provided in continuous lengths and easily cut in the field to exact length needed.

Closing the loop is simple with Connecting Links.

### TR Series Connecting Links

Chain Size	Galv.	Stainless
	Trumbull Item No.	Trumbull Item No.
1/0	<b>367-1994</b>	<b>367-1997</b>
4/0	<b>367-1995</b>	<b>367-1998</b>
5/0	<b>367-1996</b>	----

See page 11 for more info.



**Note** Ductile Iron and **ALUMINUM** Chainwheels are sprocket-type, using single loop cut chain. Carbon Steel and Stainless Steel Chainwheels are pocket-type, using smooth welded link machine chain. See page 7 for Chainwheel dimensions.



## Stainless Steel Chainwheels

Type 316 Pocket-Type, for Trumbull 316L Welded Link Machine Chain



Used to operate overhead valves from the floor.

**STAINLESS STEEL CHAINWHEELS** allow operation of valves, actuators, or gear boxes in high, hard-to reach locations by means of a slight pull on the chain. Universal design allows Chainwheel to be clamped to a handwheel, or pinned directly to the stem. Designed for corrosive environments, our Stainless Steel Chainwheels are Type 316 investment steel castings. Ideal in chemical processing, outdoor installations, or salt water environments.

Stainless Chainwheels are furnished with stainless steel attachment hardware for clamping to a handwheel. When Chainwheel is to be pinned to the stem, direct mount adapters are available. The adapters require pinning to the stem as illustrated on page 10. Adapter is pre-drilled with pin hole, and supplied with a stainless steel pin for customer mounting to the stem. Drilling of the stem by customer.

Pocket-type Chainwheels use smooth, welded link chain. Trumbull chain is calibrated specifically for use on the full range of Trumbull pocket-type Chainwheels and is required for smooth operation.

To prevent serious injury, we recommend the use of our Secondary Safety Restraint System (see pages 13 and 14). Furnished with a threaded boss for the addition of Safety Restraint System.



**CORRODED CI CHAINWHEEL** shows advantage of stainless

Trumbull Item No.	Size No.	Diameter	Boxed Weight	Handwheel Range Chainwheel will Fit**	Bore*** Diameter	Chain Length (2X Drop)
<b>367-1825</b>	TRS-4D*	4-1/8"	4.75 lbs.	1-1/2" I.D. to 4-1/2" O.D.	0.500	Plus 1 ft.
<b>367-1830</b>	TRS-6D*	5-7/8"	8.65 lbs.	2-1/8" I.D. to 6-1/4" O.D.	0.850	Plus 1 ft.
<b>367-1833</b>	TRS-8B	8"	14.40 lbs.	7-1/2" O.D. to 10-1/2" O.D.	1.500	Plus 1-1/2 ft.
<b>367-1845</b>	TRS-12B	11-5/8"	19.80 lbs.	8-1/2" O.D. to 13-1/2" O.D.	1.500	Plus 1-1/2 ft.
<b>367-1850</b>	TRS-15B	15-3/16"	23.90 lbs.	9-1/2" O.D. to 17-1/2" O.D.	1.500	Plus 2 ft.
<b>367-1860</b>	TRS-22B	22-1/4"	34.45 lbs.	13" O.D. to 25" O.D.	1.500	Plus 3 ft.
<b>367-1870</b>	TRS-29B	29-1/4"	48.00 lbs.	17-3/4" O.D. to 32" O.D.	1.500	Plus 4 ft.
<b>367-1871</b>	TRS-29C	29-1/4"	48.00 lbs.	22-1/2" O.D. to 37" O.D.	1.500	Plus 4 ft.

\* D suffix denotes "Disc", used in lieu of standard clamping hardware; see page 9 for illustration.

\*\* The ranges above are for Size "B" attachment stampings, furnished standard with TRS-8 to TRS-29 Chainwheels. Chainwheels can fit handwheel diameters outside these ranges by using optional hardware (see chart on page 9). Consult your Sales Rep for either shorter or longer attachment set stampings.

\*\*\* Consult factory if using OS&Y gate valves with stem diameters greater than bore diameters shown.

### Machine Chain



Description	Trumbull Item No.
316L SS Machine Chain	<b>367-1815</b>
SS Connecting Link	<b>367-1816</b>



Ductile Iron and Aluminum Chainwheels are sprocket-type, using single loop cut chain.  
Carbon Steel and **STAINLESS STEEL** Chainwheels are pocket-type, using smooth welded link machine chain. See page 7 for Chainwheel dimensions.

## Carbon Steel Chainwheels

*Pocket-Type, for Trumbull 316L Welded Link Machine Chain*

*Used to operate overhead valves from the floor.*

**CARBON STEEL CHAINWHEELS** allow operation of valves, actuators, or gear boxes in high, hard-to reach locations by means of a slight pull on the chain. Universal design allows Chainwheel to be clamped to a handwheel, or pinned directly to the stem.

Carbon Steel Chainwheels are furnished with stainless steel attachment hardware for clamping to a handwheel. When Chainwheel is to be pinned to the stem, direct mount adapters are available. The adapters require pinning to the stem as illustrated on page 10. Adapter is pre-drilled with pin hole, and supplied with a stainless steel pin for customer mounting to the stem. Drilling of the stem by customer.

Carbon Steel Chainwheels are finished with e-coating.

Pocket-type Chainwheels use smooth, welded link chain. Trumbull chain is calibrated specifically for use on the full range of Trumbull pocket-type Chainwheels and is required for smooth operation.

To prevent serious injury, we recommend the use of our Secondary Safety Restraint System (see pages 13 and 14). All Trumbull Chainwheels are furnished with a threaded boss for the addition of our Safety Restraint System.



Trumbull Item No.	Size No.	Diameter	Boxed Weight	Handwheel Range Chainwheel will Fit**	Bore*** Diameter	Chain Length (2X drop)
<b>367-1829</b>	TRCS-6PD*	5-7/8"	8.50 lbs.	2-1/8" I.D. to 6-1/4" O.D.	0.850	Plus 1 ft.
<b>367-1832</b>	TRCS-8PB	8"	14.35 lbs.	7-1/2" O.D. to 10-1/2" O.D.	1.500	Plus 1-1/2 ft.
<b>367-1844</b>	TRCS-12PB	11-5/8"	18.65 lbs.	8-1/2" O.D. to 13-1/2" O.D.	1.500	Plus 1-1/2 ft.
<b>367-1849</b>	TRCS-15PB	15-3/16"	24.75 lbs.	9-1/2" O.D. to 17-1/2" O.D.	1.500	Plus 2 ft.
<b>367-1859</b>	TRCS-22PB	22-1/4"	34.80 lbs.	13" O.D. to 25" O.D.	1.500	Plus 3 ft.
<b>367-1869</b>	TRCS-29PB	29-1/4"	45.05 lbs.	17-3/4" O.D. to 32" O.D.	1.500	Plus 4 ft.

\* D suffix denotes "Disc", used in lieu of standard clamping hardware; see page 9 for illustration.

\*\* The ranges above are for Size "B" attachment stampings, furnished standard with TRS-8 to TRS-29 Chainwheels. Chainwheels can fit handwheel diameters outside these ranges by using optional hardware (see chart on page 9). Consult your Sales Rep for either shorter or longer attachment set stampings.

\*\*\* Consult factory if using OS&Y gate valves with stem diameters greater than bore diameters shown.

### Machine Chain & Connecting Links

Order length of chain required.

Description

Trumbull Item No.

Plated Carbon Steel Machine Chain **367-1818**

316L Stainless Steel Machine Chain **367-1815**

Stainless Steel Connecting Link **367-1816**

Ductile Iron and Aluminum Chainwheels are sprocket-type, using single loop cut chain.



**CARBON STEEL** and Stainless Steel Chainwheels are pocket-type, using smooth welded link machine chain. See page 7 for Chainwheel dimensions.

## Sprocket-Type Chainwheel Dimensions

Ductile Iron	TR-0.0	TR-1.0	TR-1.5	TR-2.0	TR-2.5	TR-3.0	TR-3.5	TR-4.0	TR-4.5	TR-5.0
Trumbull Item Number	367-1873	367-1874	367-1875	367-1876	367-1877	367-1878	367-1879	367-1880	367-1881	367-1882
Boxed Weight (lbs.)	2.2	5.4	8.8	13.4	17.0	21.6	30.9	42.8	49.0	63.4

Aluminum	TRA-0.0	TRA-1.0	TRA-1.5	TRA-2.0	TRA-2.5	----	----	----	----	----
Trumbull Item Number	367-2020	367-2021	367-2022	367-2023	367-2024	----	----	----	----	----
Boxed Weight (lbs.)	1.0	2.7	4.2	5.3	7.9	----	----	----	----	----

Chainwheel O.D.	4"	6"	7-1/2"	9"	12-1/2"	15-1/2"	19"	22"	26"	30"
Chainwheel Assembly Fits Handwheel O.D. Range	2" to 4"	4-1/4" to 5-3/4"	6" to 7-1/2"	7-3/4" to 9"	9-1/4" to 12-1/2"	12-3/4" to 15-1/2"	15-3/4" to 19"	19-1/4" to 22"	22-1/2" to 26"	22-1/2" to 36"
Chain Size	Size #2	Size 1/0			Size 4/0			Size 5/0		
Attachment Set Size	Disk #0 367-2005	Disk #1 367-2006	"A" 367-1810		"B" 367-1811	"C" 367-1812			"D" 367-1813	
"D" (Overall Depth)	1-7/8"	2-3/8"	2-1/2"	2-1/2"	2-9/16"	2-9/16"	2-9/16"	2-5/8"	2-5/8"	3-5/16"
"H" (Overall Height)	5"	6-7/8"	8-3/4"	10-3/4"	12-5/8"	16"	19"	23"	27"	30"
"W" (Overall Width)	4-1/4"	5-7/16"	8-1/4"	9-1/2"	11-5/16"	15-7/16"	18-7/16"	22-5/8"	26-1/2"	29-7/8"
Star Adapter Size	Small		Medium			Large & X-Large see <b>NOTE</b> below				
Min/Max Bore Dia.	3/8" to 7/8"		1/2" to 1-3/8"			1/2" to 1-3/8" (Large); 1/2" to 2-1/8" (X-Large)				

**Note:** Chainwheel spokes must be drilled for the Star Adapter on the TR-4.0, TR-4.5 and TR-5.0

## Pocket-Type Chainwheel Dimensions

Carbon Steel	----	TRCS-6	TRCS-8	TRCS-12	TRCS-15	TRCS-22	TRCS-29
Trumbull Item Number	----	367-1829	367-1832	367-1844	367-1849	367-1859	367-1869
Boxed Weight (lbs.)	----	8.5	14.4	18.7	24.8	34.8	45.0


Stainless Steel	TRS-4	TRS-6	TRS-8	TRS-12	TRS-15	TRS-22	TRS-29
Trumbull Item Number	367-1825	367-1830	367-1833	367-1845	367-1850	367-1860	367-1870
Boxed Weight (lbs.)	4.8	8.7	14.4	19.8	23.9	34.5	48.0

Chainwheel O.D.	4-1/8"	5-7/8"	8"	11-5/8"	15-3/16"	22-1/4"	29-1/4"
Chainwheel Assembly Fits Handwheel O.D. Range	1-1/2" to 4-1/2"	2-1/8" to 6-1/4"	7-1/2" to 10-1/2"	8-1/2" to 13-1/2"	9-1/2" to 17-1/2"	13" to 25"	17-3/4" to 32"
Attachment Set Size	Disk #4	Disk #6	"B" Attachment Set (367-1808) provided as standard. Ranges can be expanded by optional sets "A" & "C" (see page 9).				
"D" (Overall Depth)	2-3/8"	2-5/8"	2-3/4"	2-3/4"	2-3/4"	2-3/4"	2-7/8"
"H" (Overall Height)	6-1/4"	7-1/16"	9"	13-1/8"	16-1/4"	22-1/4"	29-1/4"
"W" (Overall Width)	4-5/8"	6-3/16"	8-7/16"	12"	15-5/8"	22-5/8"	29-1/2"
Star Adapter Size	Small		Large				
Min/Max Bore Dia.	3/8" to 7/8"		1/2" to 1-3/8"				

### Dimensions

For both sprocket-type and pocket-type Chainwheels.



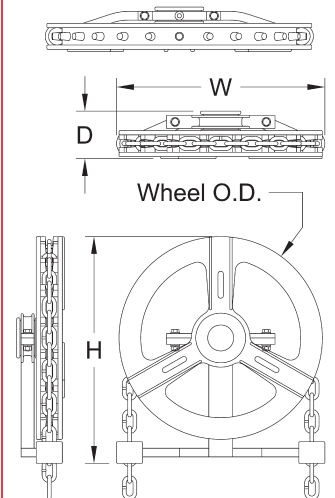

## Chain & Connecting Links

For Trumbull Chainwheels

### Sprocket-Type Chainwheels

Ductile Iron & Aluminum

**SINGLE LOOP CHAIN**  
engages with the teeth in the wheel.

### Pocket-Type Chainwheels

Carbon Steel & Stainless Steel

**WELDED LINK MACHINE CHAIN**  
fits in pockets in the wheel. Smooth chain links  
provide more comfortable operation.

### Ordering Info

When ordering chain, indicate the Chainwheel and Chain size numbers, and the number of feet of chain required. Chain is provided in continuous lengths and easily cut in the field to exact length needed.

Closing the loop is simple  
with Connecting Links...

### Single-Loop Chain

for sprocket-type Chainwheels

Chain Size	Galvanized	Stainless
	Trumbull Item No.	Trumbull Item No.
#2	<b>172-1650</b>	----
1/0	<b>367-1894</b>	<b>367-1897</b>
4/0	<b>367-1895</b>	<b>367-1898</b>
5/0	<b>367-1896</b>	<b>367-1901</b>

### Connecting Links

for sprocket-type Chainwheels

See page 11  
for installation  
instructions!

Chain Size	Galvanized	Stainless
	Trumbull Item No.	Trumbull Item No.
#2	----	----
1/0	<b>367-1994</b>	<b>367-1997</b>
4/0	<b>367-1995</b>	<b>367-1998</b>
5/0	<b>367-1996</b>	----

### Welded Link Machine Chain

Calibrated specifically for our  
pocket-type Chainwheels

316L Stainless	Zinc Plated Carbon Steel
Trumbull Item No.	Trumbull Item No.
<b>367-1815</b>	<b>367-1818</b>


### TR Series Connecting Links

for pocket-type Chainwheels

316L Stainless	Zinc Plated Carbon Steel
Trumbull Item No.	Trumbull Item No.
<b>367-1816</b>	----

## Clamp-On Attachment Sets & Discs

for Trumbull Chainwheels



**Attachment Sets**



**Clamping Disc Hardware**

Each Trumbull Chainwheel is furnished standard with Clamp-On Attachment Hardware. The smaller sizes furnished with Clamping Discs, and larger sizes with Attachment Sets, as outlined below.

### Sprocket-Type Chainwheels

Sizes TR/A-0.0 & TR/A-1.0  
use Clamping Disc hardware

Sizes TR/A-1.5 to TR/A-2.5  
use two sets of Clamp Bases & Arms, plus one Band

Sizes TR/A-3.0 to TR/A-5.0  
use three sets of Clamp Bases & Arms and do not use a Band

### Pocket-Type Chainwheels

Sizes TRS/CS-4 & TRS/CS-6  
use Clamping Disc hardware

Sizes TRS/CS-8 to TRS/CS-29  
are furnished standard with size "B" Attachment Sets. Pocket Chainwheels can fit handwheel diameters outside these ranges by using optional Hardware Sets "A" and "C" as shown on chart below

### Pocket Handwheel O.D. Ranges

Size	"A" Attachment Set		"B" Attachment Set		"C" Attachment Set	
	Min. O.D.	Max. O.D.	Min. O.D.	Max. O.D.	Min. O.D.	Max. O.D.
TRS/CS-8	6"	8"	7-1/2"	10-1/2"	12-1/2"	15-1/2"
TRS/CS-12	7"	11"	8-1/2"	13-1/2"	13-1/4"	18-1/2"
TRS/CS-15	8"	15"	9-1/2"	17-1/2"	14-1/8"	23"
TRS/CS-22	11"	22-1/2"	13"	25"	17-1/2"	30"
TRS/CS-29	16"	29"	17-3/4"	32"	22-1/2"	37"




## Direct-Mount "Star Adapters"


For both Sprocket-Type & Pocket-Type Chainwheels

**STAR ADAPTERS** are available for direct mounting of Chainwheels to valve, gear box, or actuator stem.


These adapters require pinning to the stem. Pilot holes are pre-drilled in the adapter for ease of installation on-site; the drilling of the stem is by customer. Star Adapters will be furnished with fasteners necessary to attach to Chainwheel, in lieu of clamping hardware normally furnished with Chainwheel.

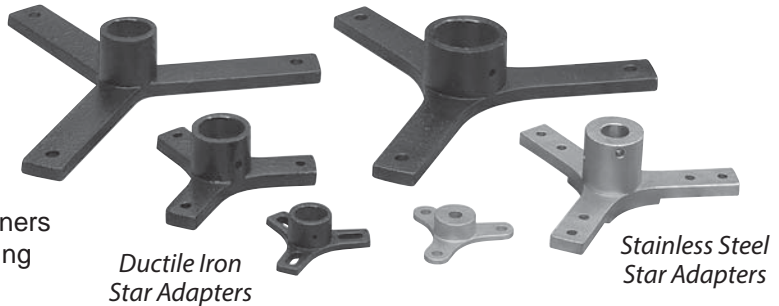

### External Assembly

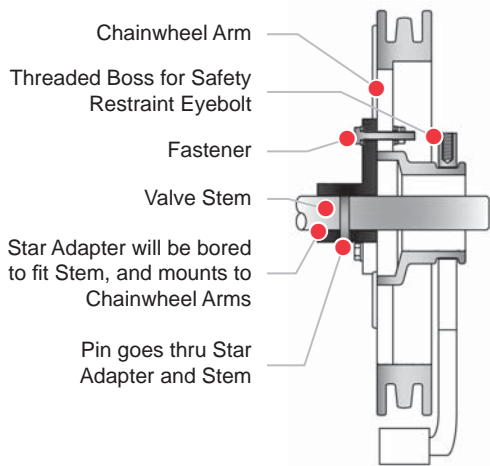

### Internal Assembly

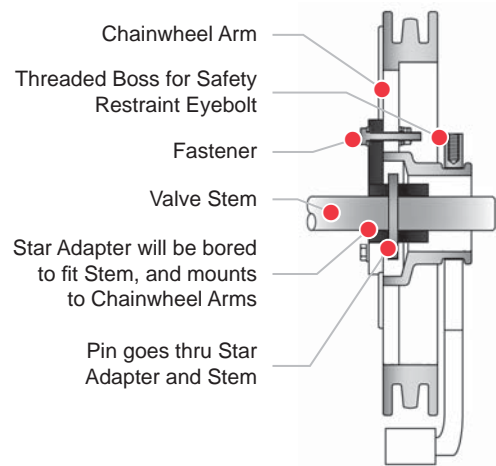

### Ductile Iron Star Adapter Dimensions - for Sprocket-Type Chainwheels

	Size 0.0	Size 1.0	Size 1.5	Size 2.0	Size 2.5	Size 3.0	Size 3.5	Size 4.0	Size 4.5	Size 5.0
<b>DI Star Adapter</b>	<b>S</b>	<b>S</b>	<b>M</b>	<b>M</b>	<b>M</b>	<b>L &amp; XL</b>	<b>L &amp; XL</b>	<b>L &amp; XL</b>	<b>L &amp; XL</b>	<b>L &amp; XL</b>
<b>Bore Size, standard</b>	3/8"		1/2"			1/2"				
<b>Hub O.D.</b>	1-1/8"		1-5/8"			L 1-5/8" / XL 2-3/8"				
<b>Optional Bore, max.</b>	7/8"		1-3/8"			L 1-3/8" / XL 2-1/8"				
<b>Hub Height</b>	3/4"		1-3/16"			1-1/2"				

### Stainless Steel Star Adapter Dimensions - for Pocket-Type Chainwheels

	Size 4	Size 6	Size 8	Size 12	Size 15	Size 22	Size 29
<b>SS Star Adapter</b>	<b>S</b>	<b>S</b>	<b>L</b>	<b>L</b>	<b>L</b>	<b>L</b>	<b>L</b>
<b>Bore Size, standard</b>	3/8"		3/4"				
<b>Hub O.D.</b>	1-1/16"		1-9/16"				
<b>Optional Bore, max.</b>	7/8"		1-3/8"				
<b>Hub Height</b>	1/2"		1-1/2"				

# TRUMBULL

**TRUMBULL INDUSTRIES, INC.**

Phone: 330.799.3333 | 1040 N. Meridian Rd.  
Toll Free: 800.677.1799 | P.O. Box 1556  
Fax: 330.392.0756 | Youngstown, Ohio 44501

[www.trumbull-mfg.com](http://www.trumbull-mfg.com)

## TR Series Connecting Links

*Used to Connect Chain for use with Sprocket Chainwheels*

**TR SERIES CONNECTING LINKS** are used to connect single loop chain for use with Trumbull ductile iron and aluminum sprocket Chainwheels. Pre-formed Connecting Links eliminate the need to cut and bend chain to form a loop.

Available in three sizes; 1/0, 4/0 and 5/0.

Chain Size	Galvanized		316 Stainless Steel	
	Trumbull Item No.	Weight	Trumbull Item No.	Weight
1/0	<b>367-1994</b>	0.02 lbs.	<b>367-1997</b>	0.02 lbs.
4/0	<b>367-1995</b>	0.03 lbs.	<b>367-1998</b>	0.03 lbs.
5/0	<b>367-1996</b>	0.05 lbs.	----	----

Installation is **EASY**,  
just follow these five steps...

**1**

Cut chain to desired length.  
Cut and remove excess link pieces.

**2**

Install connecting link  
by inserting looped end of chain  
into the open end of connecting link.

**3**

Slide the chain to the back side  
of connecting link as shown.

**4**

Lay opposite end of chain  
onto the connecting link.

**5**

Firmly grip connecting link with pliers  
and/or adjustable pliers and crimp the open  
end of connecting link over to complete connection.



## "Chain-Up" Device


*Eliminates a Potential Safety Hazard Presented by Overhead Chains*

Chainwheels are installed to provide access to overhead valves. However, they frequently result in chain hanging into the pathway of workers, creating an obstacle course or safety hazard.

The "Chain-Up" device stores chain overhead and safely above the pathway. Simply hook the clevis pin into a chain link at the desired overhead height and insert the chain into the device. Pull on the handle to release the chain for operation. After use, the chain is placed back into the Chain-Up, and hooked at the desired height. Furnished in Safety Orange. Made of high-strength thermoplastic polymer.



*Chain in pathway.*

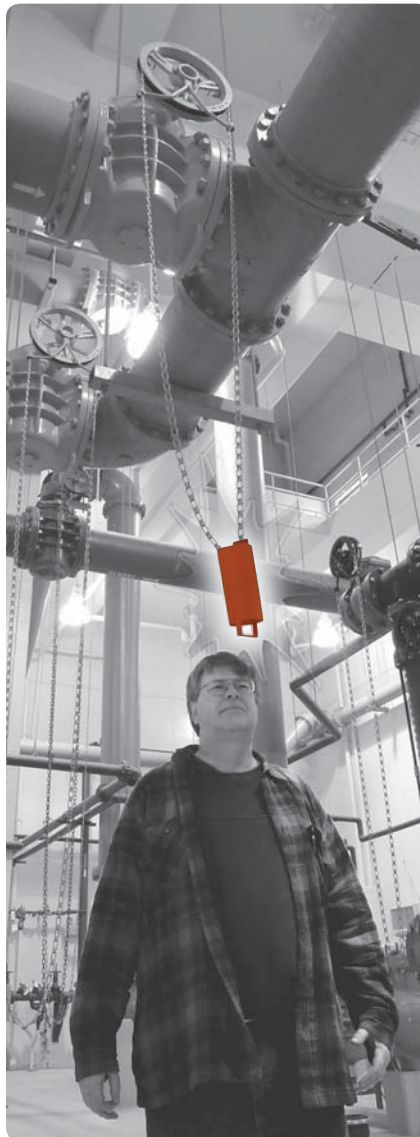

**CHAIN-UP DEVICE**  
*stores the chain above pathway.*



<i>Trumbull Item No.</i>	<i>Overall Length</i>	<i>Weight</i>
<b>367-1890</b>	11-3/4"	0.55 lbs.

For additional Chainwheel safety, always use Trumbull's Chainwheel Safety Restraint System (see page 13 & 14 for more information).



Now You Can  
**PREVENT SERIOUS INJURY**  
With Our . . .

*Secondary*  
**Safety Restraint System**

If a Chainwheel is properly installed, maintained and inspected, it should never separate from the valve and fall to the ground. Although the likelihood of a Chainwheel falling is small, the result could be a serious injury or even a fatality.

Safety Cable Kits can be economically added to the Chainwheel installation. One end is attached to the Chainwheel and the other to a permanent part of the valve or an adjacent pipe.

Cable, clips and eyebolts are made from Type 316 stainless steel for long life in even the most corrosive environments.




**Step 1** Order Kit

Trumbull  
Item No.

**367-1975**

Kit is furnished with  
5 feet of safety cable  
and 4 cable clamps.


Eyebolts must be  
ordered separately,  
see chart on right...

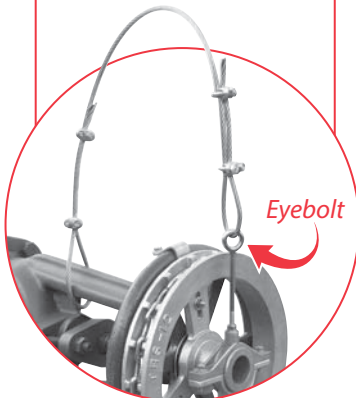

**Step 2** Select Eyebolt

	Chainwheel Model	Eyebolt Length	Trumbull Item No.
Stainless Steel	TRS-4	----	1" <b>367-1974</b>
	TRS-6	TRCS-6	1" <b>367-1974</b>
	TRS-8	TRCS-8	3" <b>367-1973</b>
	TRS-12	TRCS-12	6" <b>367-1972</b>
	TRS-15	TRCS-15	6" <b>367-1972</b>
	TRS-22	TRCS-22	13" <b>367-1970</b>
	TRS-29B	TRCS-29B	16" <b>367-1969</b>
	TRS-29C	TRCS-29C	18" <b>367-1967</b>
Ductile Iron	TR-0.0	TRA-0.0	2" <b>367-1968</b>
	TR-1.0	TRA-1.0	2" <b>367-1968</b>
	TR-1.5	TRA-1.5	3" <b>367-1973</b>
	TR-2.0	TRA-2.0	3" <b>367-1973</b>
	TR-2.5	TRA-2.5	6" <b>367-1972</b>
	TR-3.0	----	9" <b>367-1971</b>
	TR-3.5	----	9" <b>367-1971</b>
	TR-4.0	----	9" <b>367-1971</b>
	TR-4.5	----	13" <b>367-1970</b>
	TR-5.0	----	18" <b>367-1967</b>


Safety  
Restraints  
**PROTECT  
WORKERS**  
from  
**POTENTIAL  
INJURY!**

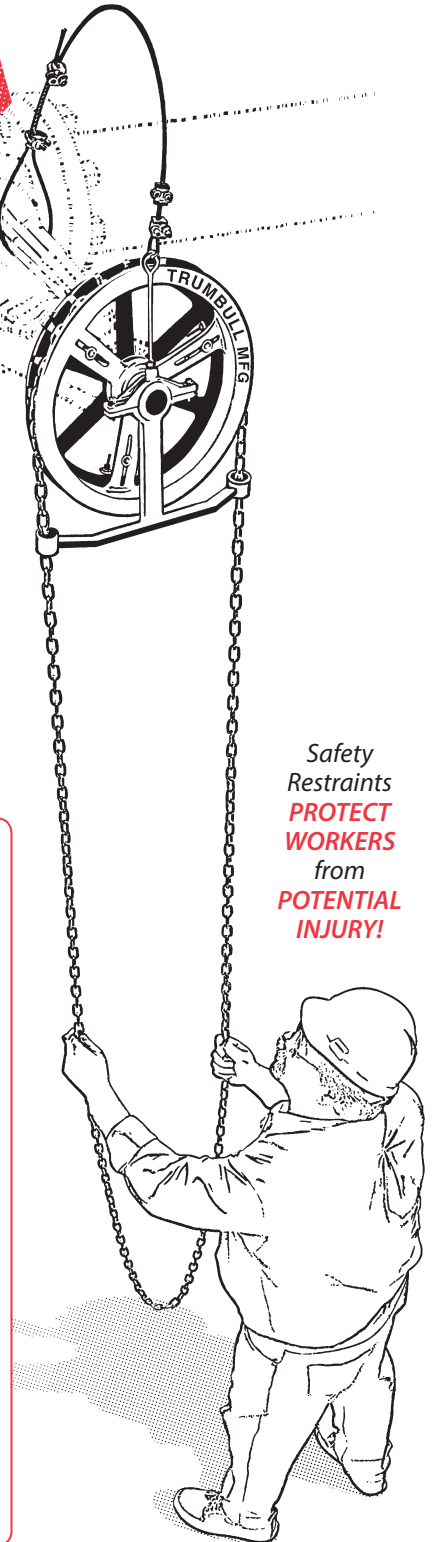

Installing the Safety Restraint is as easy as . . .

# 1-2-3-4

1

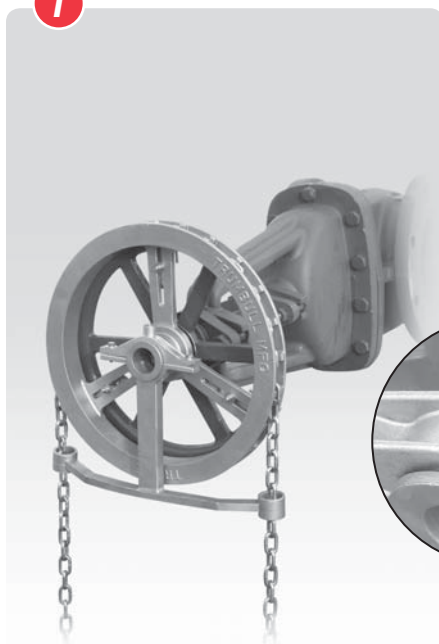

Typical chainwheel installation. Safety cap is threaded to accept eyebolt.

2



Install safety cable eyebolt and use jam nut to secure in place.

3



Loop cable through eyebolt leaving about 6" excess.

Install one cable clamp about 1" from end, and the second clamp as close to the eyebolt as possible.

**Note**

Eye of eyebolt must be parallel to Chainwheel and u-bolt nuts should face AWAY from the Chainwheel.

4



Loop other end of cable around a secure object. Cable can be attached to yoke of valve or an adjacent pipe.

**Note**

Tighten all four clamp nuts evenly to 15 ft-lb minimum.